



83 x 83 x 25 mm

- Motor Design : Single Phase, Shaded Pole Motor (4 Pole)
- Housing : Aluminium Die - cast Alloy
- Bearing : Sleeve Bearing (Self Lubricating)
- Operating Voltage : 185 - 245 VAC
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Lead Wire
- * Feature : Mounting 2 Legs
- Motor Protection : Impedance Protected.
- Direction of Rotation : CCW
- Operating Temperature : - 40 to + 40°C
- Net Weight : 1570 Grams

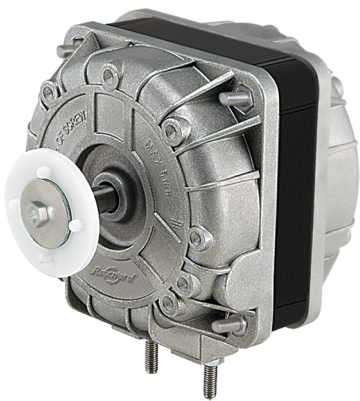

Specification

Model	Bearing	Fan Blade	Degree Angle	Voltage	Frequency	Current	Input Power	Output Power	Speed	Air Flow
REC		Ø		V	Hz	A	W	W	RPM	CFM
8325 - 16 A2	Sleeve	230	34°	230	50 / 60	0.36 / 0.34	55 / 56	16	1300 / 1500	510
	Sleeve	254	28°	230	50 / 60	0.77 / 0.35	59 / 62	16	1300 / 1500	580

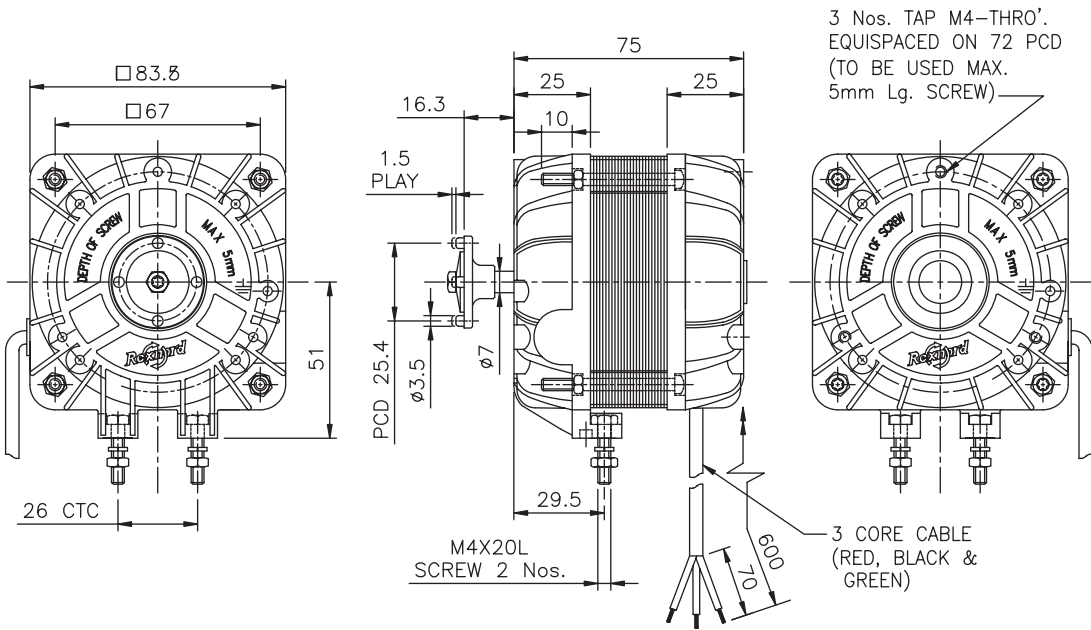

* Specifications Subject to Change Without Notice