


120 x 120 x 38 mm

- Motor Design : Shaded Pole
- Housing : Aluminium Die - cast
- Impellor : PBT (Polybutylene Terephthalate)
- Bearing : Sleeve or Ball Bearing
- Operating Voltage : 115V (85 ~ 125 VAC)
230V (185 ~ 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : T = Terminal
- Motor Protection : Impedance Protected
- Operating Temperature : - 10 to +70°C for Sleeve Bearing
- 20 to +70°C for Ball Bearing
- Net Weight : 510 Grams



Specification

Model	Bearing	Voltage	Frequency	Current	Input Power	Speed	Air Flow	Static Pressure	Noise
REC		V	Hz	A	W	RPM	CFM	mm H ₂ O	dB(A)
22038 A1 M T	Sleeve	115	50/60	0.23/0.19	16/15	2650/2900	85/110	6.4/7.6	43/48
22038 B1 M T	Ball	115	50/60	0.23/0.19	16/15	2700/3000	90/115	6.8/8.0	43/48
22038 A2 M T	Sleeve	230	50/60	0.13/0.11	20/17	2650/2900	85/110	6.4/7.6	43/48
22038 B2 M T	Ball	230	50/60	0.13/0.11	20/17	2700/3000	90/115	6.8/8.0	43/48

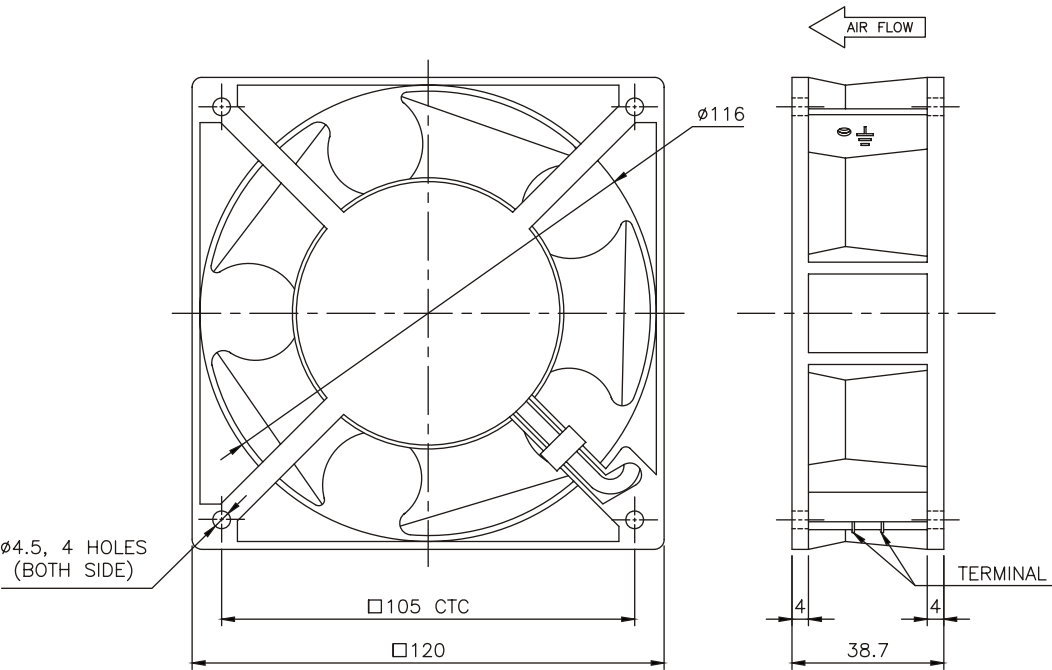

* Specifications Subject to Change Without Notice