

120 x 120 x 38 mm


- Motor Design : Shaded Pole (External Rotor)
- Housing : Aluminium Die - cast
- Impellor : Metal
- Bearing : Ball Bearing
- Operating Voltage : 230V (185 - 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Terminal
- Motor Protection : Impedance Protected
- Operating Temperature : - 20 to +70°C
- Net Weight : 530 Grams



Specification

Model	Bearing	Voltage	Frequency	Current	Input Power	Speed	Air Flow	Static Pressure	Noise
REC		V	Hz	A	W	RPM	CFM	mm H ₂ O	dB(A)
12038 B2 H T - MB	Ball	230	50/60	0.13 /0.10	20/17	2700 /3000	106/120	7.6/7.0	41/45

Note : Also Available in 115 VAC

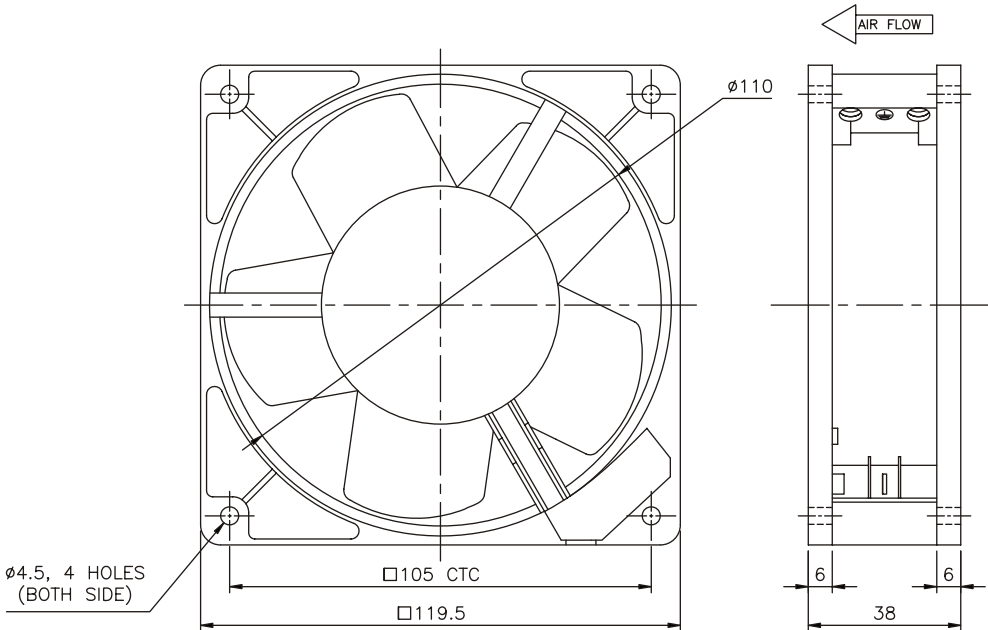

* Specifications Subject to Change Without Notice