


280 x 280 x 80 mm

- Motor Design : External Rotor with Capacitor Driven Motor
- Housing : Aluminium Die-cast
- Impellor : Metal
- Bearing : Ball Bearing
- Operating Voltage : 230V (185 - 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class F
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Terminal PA - 10
- Operating Temperature : - 20 to +80 °C
- Net Weight : 2900 Grams (2.9 Kg)



Specification

Model	Bearing	Voltage	Frequency	Current	Input Power	Speed	Air Flow	Static Pressure	Noise
REC		V	Hz	A	W	RPM	CFM	mm H ₂ O	dB(A)
28080 B2 H W - MB - C	Ball	230	50/60	0.40/0.56	100/122	2540/2840	1060/1150	14	68/70

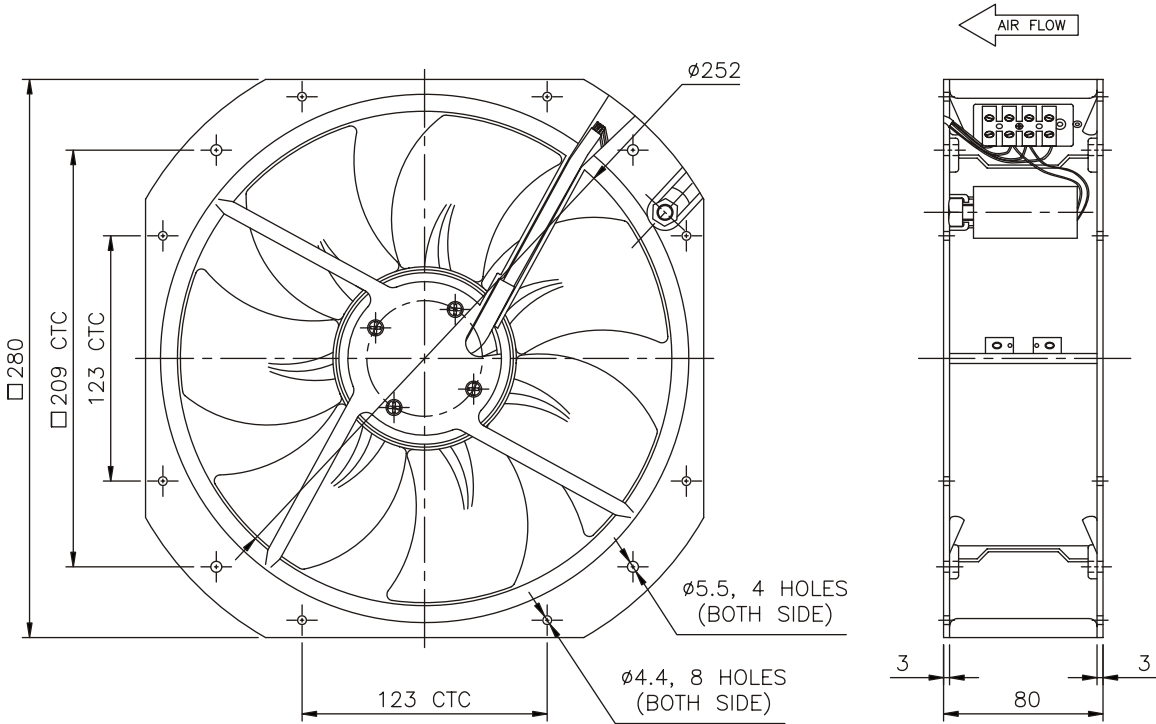

* Specifications Subject to Change Without Notice