



61 x 61 x 25 mm

- Motor Design : Shaded Pole Motor
- Housing : Aluminium Die - cast
- Gears : Plastic Gears & Sintered iron Gears.
- Bearing : Sleeve Bearing
- Operating Voltage : 230V (185 - 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Lead Wire
- Motor Protection : Thermal Protected
- Direction of Rotation : CW
- Operating Temperature : 4°C to + 40°C
- Net Weight : 1055 Grams

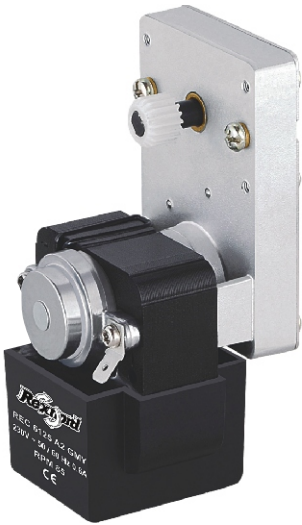

Specification (No Load)

Model	Bearing	Voltage	Frequency	Current	Power Consumption	Speed	Torque	Noise
REC		V	Hz	A	W	RPM	Kgf.cm	dB(A)
6125 GM - A2 W	Sleeve	230	50 / 60	0.55 / 0.33	37 / 27	85 / 105	7	50

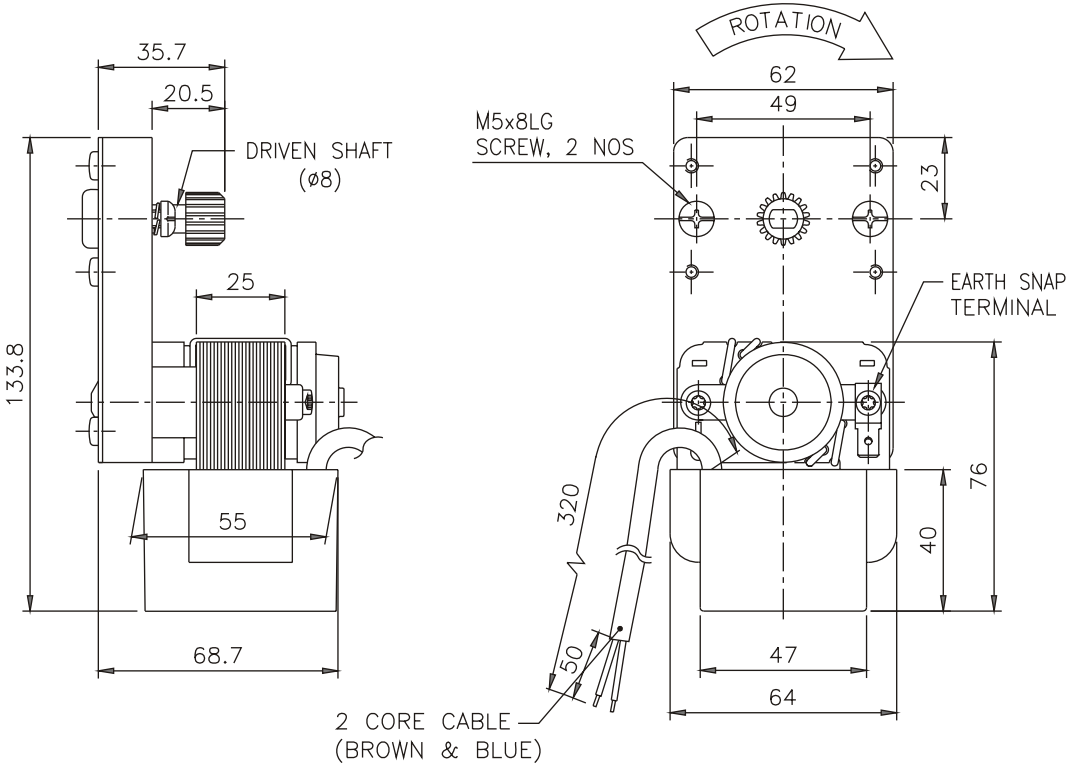

* Specifications Subject to Change Without Notice