


61 x 61 x 25 mm

- Motor Design : Shaded Pole Motor
- Housing : Aluminium Die - cast
- Bearing : Sleeve Bearing
- Operating Voltage : 230V (185 - 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Lead Wire
- Motor Protection : Impedance Protected
- Direction of Rotation : CW / CCW
- Operating Temperature : - 40 to + 40°C
- Net Weight : 775 Grams (860 Grams with Potting)

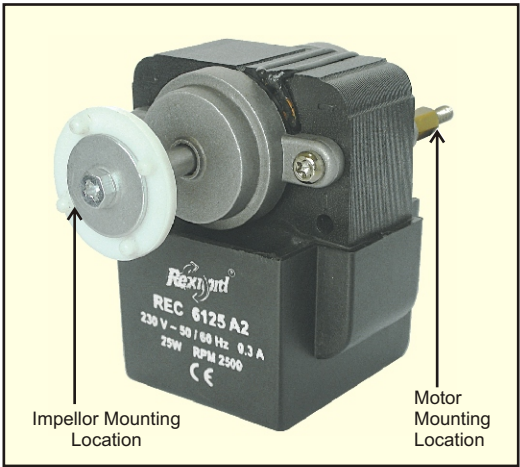


- Note :** Suitable Impellor
- 1) Aluminium Impellor Ø 150 mm (Air Flow Suction - V)
- 2) Aluminium Impellor Ø 150 mm (Air Flow Throw - A)

Specification

Model	Insulation	Bearing	Fan Blade	Voltage	Frequency	Current	Power Consumption	Speed	Air Flow
REC			Ø	V	Hz	A	W	RPM	CFM
6125 A2 - 01	With Potting	Sleeve	150	230	50	0.24	25	2500	170

Note : Also Available in 115 VAC

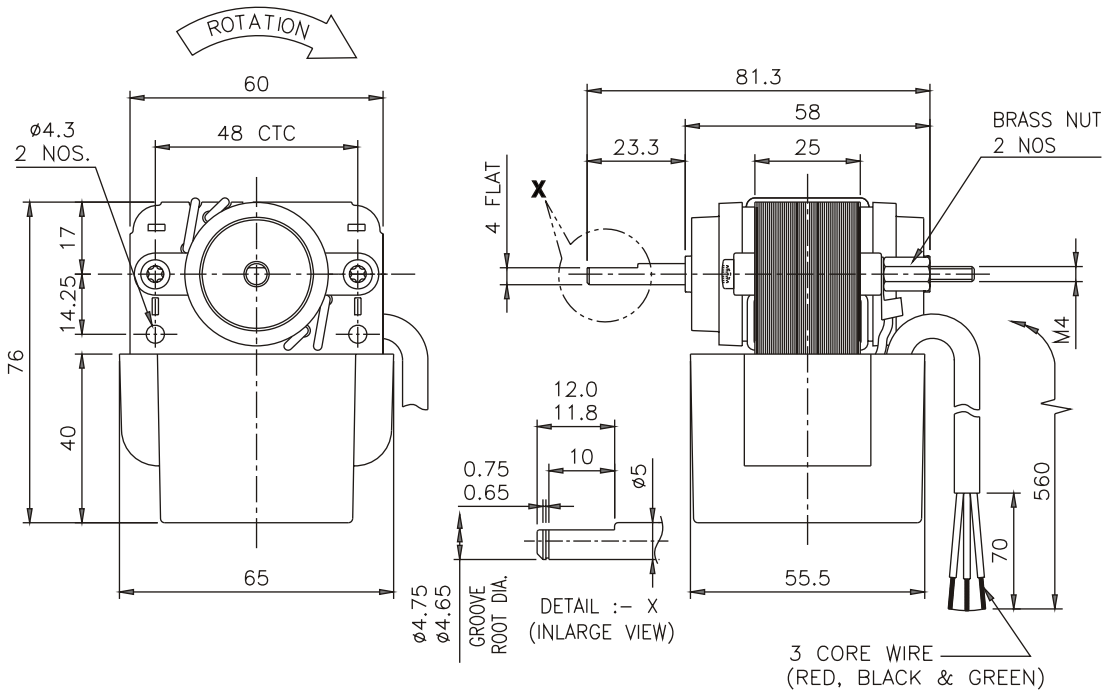

* Specifications Subject to Change Without Notice